


UNI 7688 | EN ISO 7046-2 | DIN 965

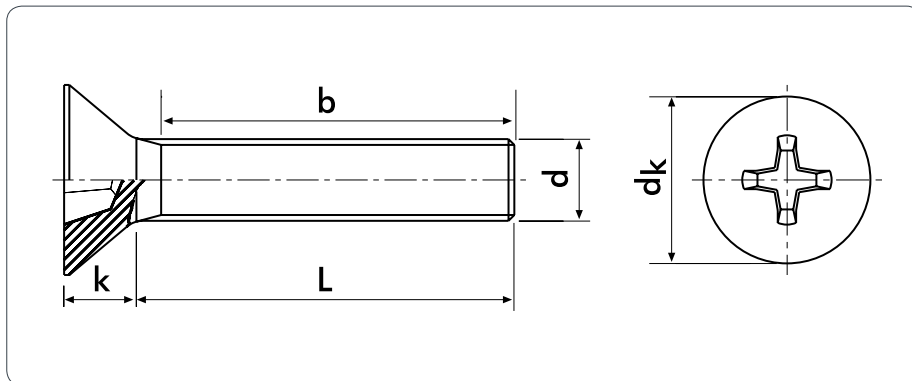

Parafuso rosca de metais cabeça embeber phillips

Cross recessed countersunk head screw, zinc plated | Tornillo cabeza avellanada con hueco cruciforme, zincado | Vis à métaux tête fraisée à empreinte cruciforme, zingué | Viti a metallo TSP PH

D	M3	M4	M5	M6	M8	M10
P (1)	0.5	0.7	0.8	1	1.25	1.5
b min	19	22	25	28	34	40
dk max	5.6	7.5	9.2	11	14.5	18
k max	1.65	2.2	2.5	3	4	5
n° bit	1	2	2	3	4	4
L (mm)	peso/ weight/ peso/ poids/ peso - 1000pc/Kg					
3						
4	0.290					
5	0.335	0.676				
6	0.379	0.754	1.21			
8	0.467	0.910	1.45	2.19		
10	0.555	1.06	1.70	2.54	5.03	
12	0.643	1.22	1.95	2.89	5.67	9.59
14	0.731	1.37	2.19	3.25	6.30	10.6
16	0.820	1.53	2.44	3.60	6.94	11.6
18	0.908	1.68	2.69	3.95	7.57	12.6
20	0.996	1.84	2.94	4.31	8.21	13.6
22	1.08	1.99	3.18	4.66	8.84	14.6
25	1.22	2.22	3.55	5.19	9.79	16.1
28	1.35	2.46	3.93	5.72	10.7	17.6
30	1.44	2.61	4.16	6.08	11.4	18.6
35		3.00	4.65	6.96	13.0	21.1
40		3.38	5.40	7.84	14.6	23.6
45			6.02	8.73	16.2	26.1
50			6.65	9.61	17.8	28.6
55					19.4	31.1
60						33.7

Outras medidas sob consulta | Other measures upon request | Otras medidas solo bajo encargo | Autres mesures sur demande | Altre misure a richiesta
Os tamanhos acima da linha são com rosca total | The sizes above the line are fully threaded | Los Tamaños por encima de la línea son totalmente roscados | Les dimensions au-dessus de la ligne sont avec filetage total. | Le misure sopra la linea sono totalmente filettate
P (1) passo de rosca | thread pitch | paso de rosca | pas filetage | passo del filetto

Vários acabamentos. Peça-nos mais informações. | Surface treatment. Please ask us for more information. | Acabamientos variados. Pídenos más información. | Plusieurs finitions. Contactez-nous pour plus d'informations. | Ricopertura di superficie. A richiesta.

